


مشخصات کابل بلندگوی SC1500

توضیحات: کابل بلندگو با عملکرد بالا و انعطاف پذیری زیاد، شامل دو رشته ۲/۵ میلی متر مربع (14 AWG)

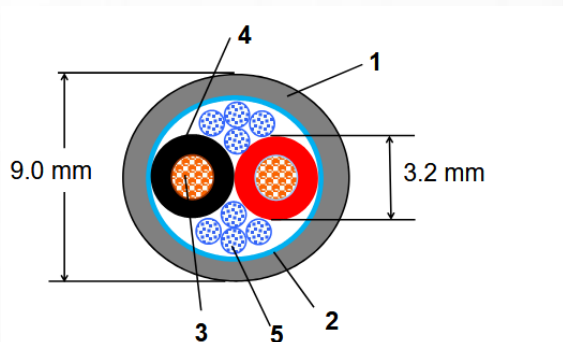

شرح:

۱- غلاف

۲- جداکننده پنبه‌ای بین اجزا

۳- رشته‌ی اصلی انتقال جریان

۴- عایق اطراف هادی

۵- رشته‌های پرکننده برای پایداری

مشخصات مکانیکی		
Conductor area		2.5 mm ² / 14 AWG
Composition of conductor		bare annealed copper
Conductor insulation		PVC(Polyvinyl chloride) Diameter:3.0mm+/-0.1mm
Conductor colour		Red and Black
Composition of cores		2 twisted cores,100MM+/-12mm one turn, lefthand
Filler		Cotton Strand
Jacket material		PVC with restricted Substance: Cadmium: <5PPM('Cadmium free') Lead: <50PPM Mercury: <2PPMChromium: Not contained
Jacket colour		According Customer request
Jacket surface, characteristic & appearance		not shiny, not sticky moderate smell.
Overall diameter		Ø 9.0 mm, tolerance:+/- 0,2mm
Flexibility, Mechanical Characteristic		According approved Samples
Working temperature	Mobile	-5°C to +70°C
	Fixed	-20° to +70°C
Cable Printing		According Customer request



مشخصات الكتریکي		شرایط
Conductor DC resistance	$\leq 10 \text{ mOhm/m}$	20° C
Insulation resistance	$> 1 \text{ GOhm/Km}$	20°C, 500 V _{DC}
Capacitance conductor/conductor	$\leq 180 \text{ pF/m}$	1 KHz
Test voltage: conductor/conductor	500 V eff	50 Hz, 1 Minute