


Description: High Performance, High Flexible, Loudspeaker Cable, 2x2.0mm²/14AWG

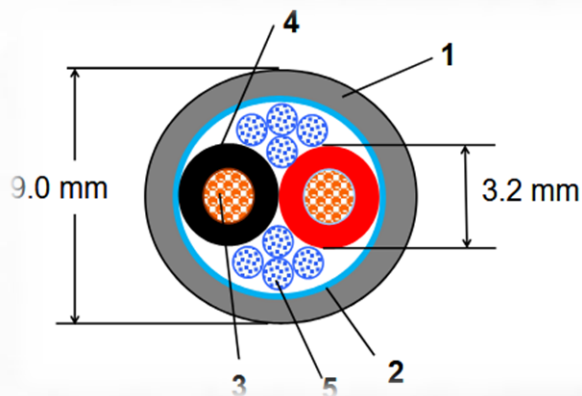

Legend:

- 1 Jacket
- 2 Cotton paper separator
- 3 conductor
- 4 conductor insulation
- 5 filler cord

Mechanical Specification		
Conductor area	2.5 mm ² / 14 AWG	
Composition of conductor	bare annealed copper	
Conductor insulation	PVC(Polyvinyl chloride) Diameter:3.0mm+/-0.1mm	
Conductor colour	Red and Black	
Composition of cores	2 twisted cores,100MM+/-12mm one turn, lefthand	
Filler	Cotton Strand	
Jacket material	PVC with restricted Substance: Cadmium: <5PPM('Cadmium free') Lead: <50PPM Mercury: <2PPMChromium: Not contained	
Jacket colour	According Customer request	
Jacket surface, characteristic & appearance	not shiny, not sticky moderate smell.	
Overall diameter	Ø 9.0 mm, tolerance:+/- 0,2mm	
Flexibility, Mechanical Characteristic	According approved Samples	
Working temperature	Mobile	-5°C to +70°C
	Fixed	-20° to +70°C
Cable Printing	According Customer request	



Electrical Specification		conditions
Conductor DC resistance	≤ 10 mOhm/m	20° C
Insulation resistance	> 1GOhm/Km	20°C, 500 V _{DC}
Capacitance conductor/conductor	≤ 180 pF/m	1 KHz
Test voltage: conductor/conductor	500 V eff	50 Hz, 1 Minute